
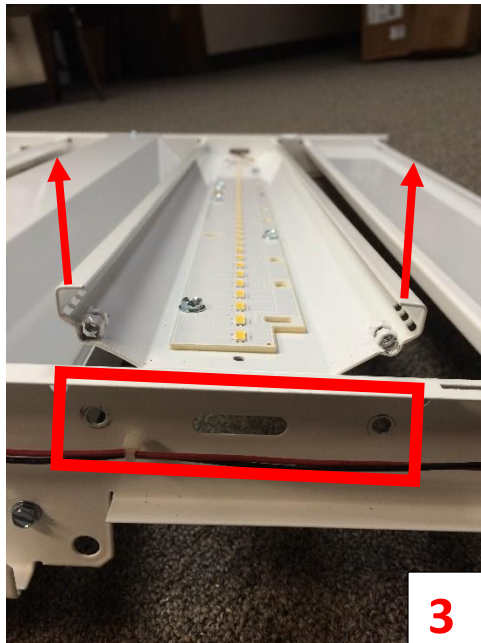


July 2015

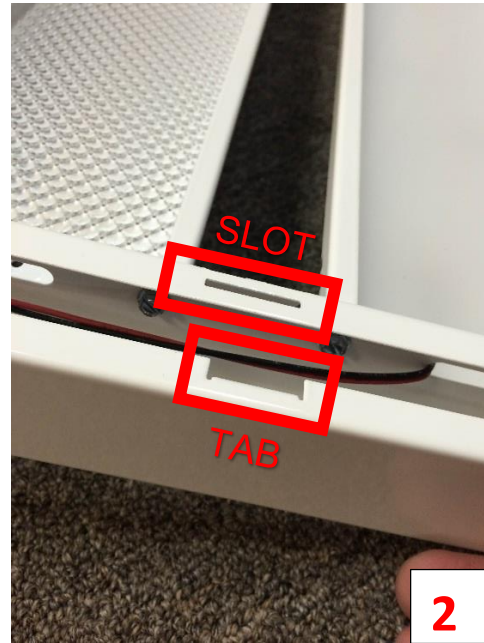

1. Take out the 2 screws on the end cap (image 1).
2. Remove the end cap. Lift from the bottom of the plate and push up to release from the tab (image 2).
3. Remove the screws that hold the LED tray in place (image 3).
4. Pull the LED tray up just enough to slide in the lens (image 3).
5. Push the LED tray back down and put the screws back in (image 4).
6. Replace the end cap. Make sure you align the tabs on the top first, then push down and put the screws back in.

** Keep the screws separate - they are different sizes **