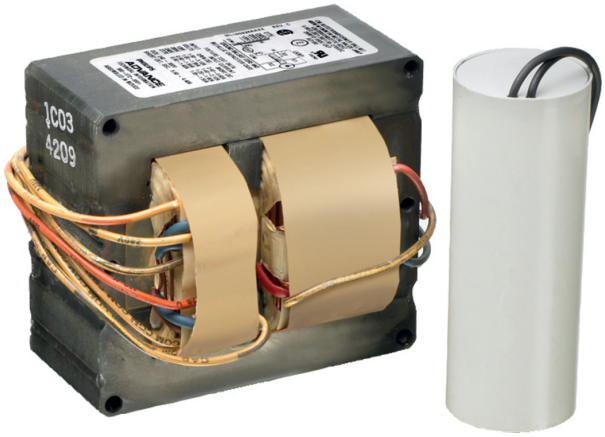

Core & Coil (71A) MH ~LT~ 175W

CORE & COIL HID MH BAL 50W M110 QUAD KIT

The basic ballast is the open core and coil which is most often used as a component within a lighting luminaire. The core and coil also forms the nucleus of Philips Advance's five other ballast configurations.

Product data

• General Information

ANSI Code	M110
Lamp Type	50W MH
Number of Lamps	1 piece/unit
Circuit Type	HX-HPF
Ballast Type	Magnetic HID
Base Model	71A5191
Core Size	3 X 4 (2 coil)
Suitable For Outdoor Use	Yes
Ignitor Catalog Number	LI533-H4
Ignitor Temperature Rating	105°C
Capacitor Value	6 MFD
Capacitor Catalog Number	7C060L30RA
Capacitor Require-ments	280V
Capacitor Tempera-ture Rating	105°C
Capacitor Diameter/ Oval Dimensions	1.25 in
Capacitor Height	2.75 in
Automatic Restart	No

• Operating and Electrical

Input Voltage	120/208/240/277 V
Input Frequency	60 Hz
Inp. Current (Open Circuit)	1.2/0.68/0.59/0.51 A
Input Current (Starting)	0.46/0.27/0.17/0.2 A
Input Current (Short Circuit)	0.42-0.65/0.25-0.37/0.21-0.32/0.16-0.2 7 A
Secondary Short Circuit Current	0.7-0.88 A
Constant Wattage Deviation	10%
Ballast Factor (Nom)	1
Power Factor (Nom)	0.90
Nominal Open Circuit Voltage	254 V
Input Current (Oper-ating) (Nom)	0.58/0.33/0.29/0.25 A A
Input Power (Nom)	67 W
Rated Lamp Watts	50W W

• Wiring

Wire Striplength	0.5 mm
Wire Length By Color	12"
Wire Type	Stranded
Remote Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	10'
Recommended Fuse Value	3/3/2/2 A

• Approval and Application

Open Circuit Voltage Test (Volts)	228-280 V
Approbation Marks	ULR CSA certificate RoHS Compliant
Temperature Marking	A/A/A/A

PHILIPS

Core & Coil (71A) MH ~LT~ 175W

UL Recognized	Yes
Hipot Test (1 Minute)	2000 V
Hipot Test (2 Seconds)	2500 V
UL Insulation Class	H(180°C)
UL Temperature Code	1029A

EAN/UPC - Product	781087082782
Order code	71A5191001D
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	913701135901
Net Weight (Piece)	2.228 kg

- Product Data

Order product name	CORE & COIL HID 71A5191001D

Dimensional drawing

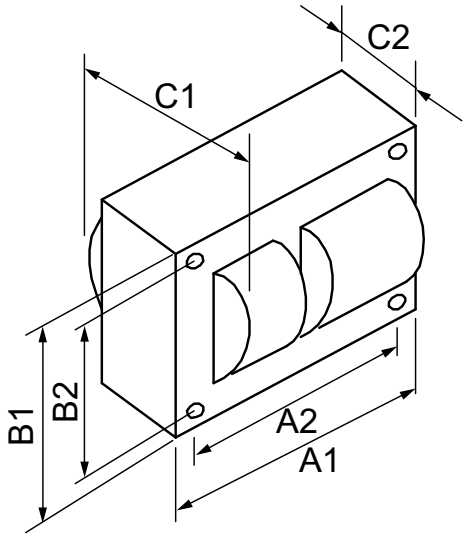

MH BAL 50W M110 QUAD KIT

Product	C1	C2	A1	A2	B1	B2
CORE & COIL HID 71A5191001D	2.23 in	1.18 in	3.9 in	3.5 in	2.8 in	2.4 in

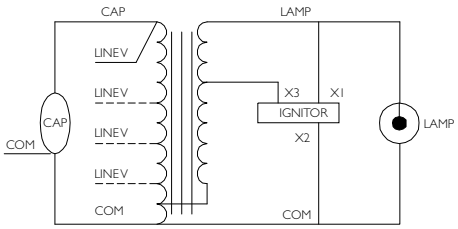

© 2016 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2016, February 1
data subject to change