Data sheet | Item number: 773-162

PUSH WIRE® connector for junction boxes; 2-conductor; transparent housing; yellow face

www.wago.com/773-162

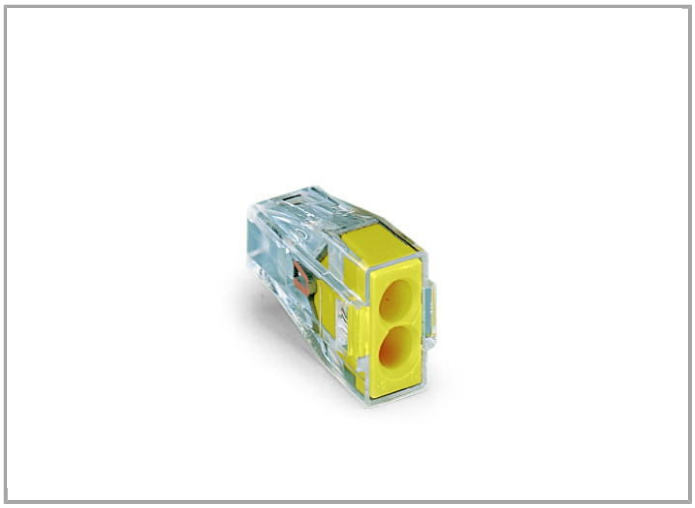

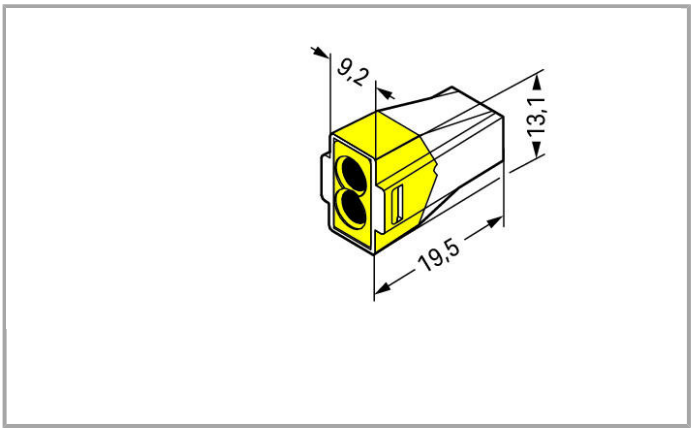

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated voltage (II / 2)	400 V
Rated impulse voltage (II / 2)	4 kV
Rated current	24 A
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2

Connection data

Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper Aluminum
Solid conductor	0.75 … 2.5 mm² / 18 … 12 AWG
Strip length	12 mm / 0.47 Inch
Total number of connection points	2
Total number of potentials	1
Type of wiring	Side-entry wiring

Geometrical Data

Width	9.2 mm / 0.362 inch
Height	13.1 mm / 0.516 inch
Depth	19.5 mm / 0.768 inch

Material Data

Color	transparent
Cover color	yellow
Flammability class per UL94	V2
Weight	1.847 g

Environmental Requirements

Surrounding air (operating) temperature	60 °C

Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4044918397995

Approvals / Certificates

Country specific Approvals

Logo	Approval	Certificate name
	CSA DEKRA Certification B.V.	1053495

UL-Approvals

Logo	Approval	Certificate name
	UL UL International Germany GmbH	E69654

Compatible products

Mounting adapter

Item no.: 773-332
Mounting carrier; 773 series PUSH WIRE® connectors for junction boxes; orange
www.wago.com/773-332

General accessories

Item no.: 249-130
Syringe; Contents: 20 ml Alu-Plus contact paste
www.wago.com/249-130

Subject to changes.

WAGO Corporation
Germantown, WI 53022
32423 Minden
Phone: +49571 887-0 | Fax: (262) 255-6222
Email: info.us@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at {0}.