LED A19-A21

Philips A19/A21 LED lamps are the smart alternative to standard incandescent. The unique lamp design provides omni-directional light with excellent dimming performance.

Product data

General Information	
Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	16-100W

Light Technical	
Color Code	927
Beam Angle (Nom)	250 °
Initial lumen (Nom)	1600 lm
Luminous Flux (Rated) (Nom)	1600 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	100.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	16 W
Lamp Current (Nom)	145 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	90 °C

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Finish	Frosted (FR)

Product Data	
Order product name	16A21/PER/927/P/E26/DIM 6/1FB T20
EAN/UPC - Product	046677550509
Order code	550509
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002036804
Net Weight (Piece)	0.174 kg

LED A19-A21

Dimensional drawing



Product	D	C
16A21/PER/927/P/E26/DIM 6/1FB T20	78 mm	140 mm

A21 120V 17.7-100W 1600lm 2700K E26 D

Photometric data



40 60 75 100W E26 A19 A21 Frosted

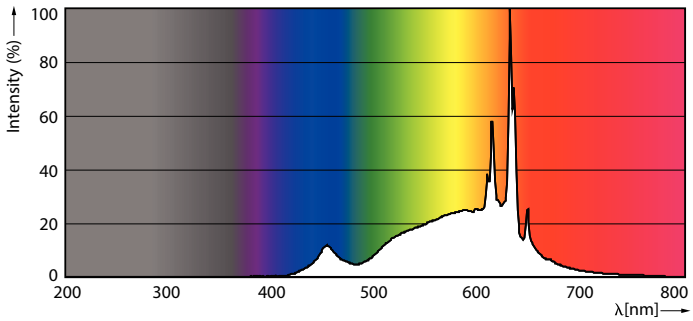

100W E26 A21 927 Frosted



100W E26 A21 927 Frosted

LED A19-A21

Lifetime

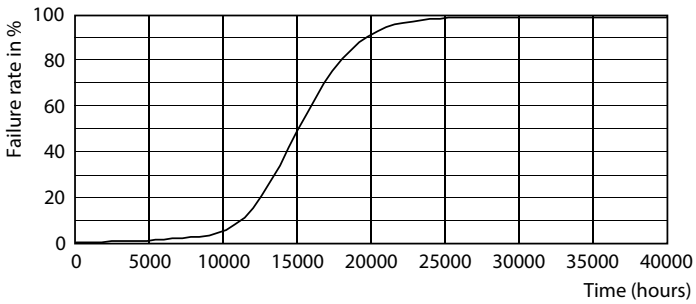

LEDbulb_15K LED

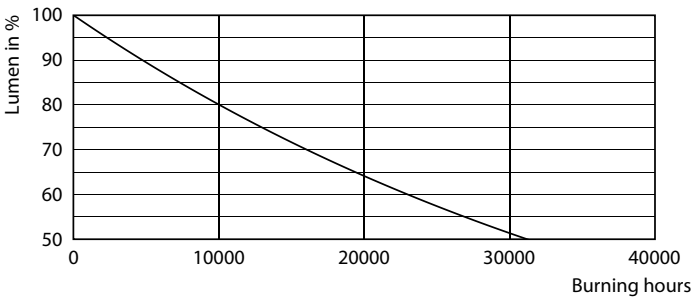

LEDbulb_15K LMP

© 2019 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.