



LED PAR38

14PAR38/COR/930/F25/DIM/120V T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.


Product data

General Information	
Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	14-120W
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	1300 lm
Luminous Intensity (Nom)	5382 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	92.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	14 W
Lamp Current (Nom)	136 mA
Wattage Equivalent	120 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	14PAR38/COR/930/F25/DIM/120V T20 6/1FB
EAN/UPC - Product	046677546946
Order code	546945
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002045204
Net Weight (Piece)	0.385 kg

LED PAR38


Dimensional drawing




PAR38 13.3-120W 1200lm 25D 3000K E26 D

Product	D	C
14PAR38/COR/930/F25/DIM/120V T20 6/1FB	125 mm	131 mm

Photometric data




©2019 Phosoronic LLC. All Rights Reserved. Page 11



LEDspots 14W PAR38 E26 930 25D


LEDspots 14W PAR38 E26 930 25D

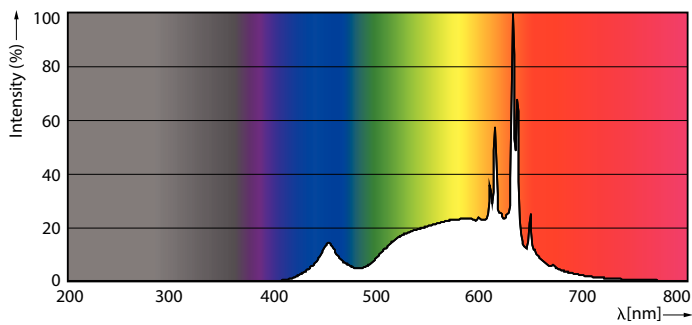


LEDspots 14W PAR38 E26 930

LED PAR38

Lifetime

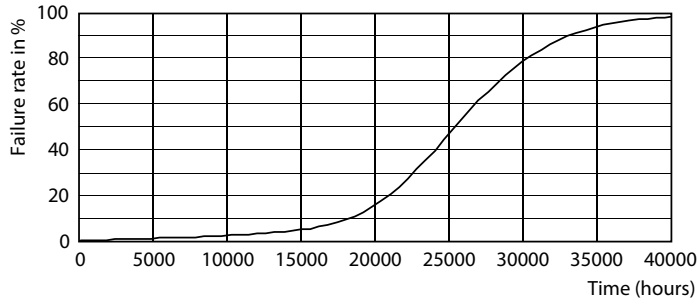

LEDspots LED 25K

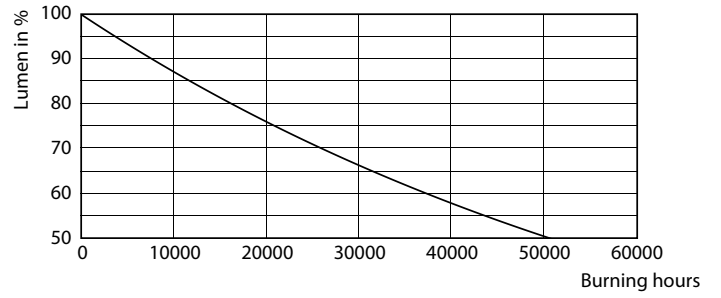

LEDspots LMP 25K

