Retail Sales T8

F15T8 SOFT WHITE/18 ALTO 6PK

Energy Savings, extra long life, extra low mercuryT8 lamps offer high energy savings, superior lumen output, and long life in an environmentally responsible lamp.

Product data

- General Information

Cap-Base	Medium Bi-Pin [Medium Bi-Pin]
Life To 10% Failures (Nom)	10000 h
Life To 50% Failures (Nom)	13000 h
Features	ALTO® (ALTO)

- Light Technical

Color Code	830 [CCT of 3000K]
Initial lumen (Nom)	990 lm
Color Designation	Soft White
Lumen Maintenance 2000 h (Nom)	93 %
Lumen Maintenance 5000 h (Nom)	88 %
Chromaticity Coordinate X (Nom)	442
Chromaticity Coordinate Y (Nom)	406
Correlated Color Temperature (Nom)	3000 K
Color Rendering Index (Nom)	83

- Operating and Electrical

Power (Rated) (Nom)	15.5 W
Lamp Current (Nom)	0.335 A
Voltage (Nom)	55 V

- Controls and Dimming

Dimmable	Yes

- Mechanical and Housing

Cap-Base Information	Green [Green Cap]

- Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg

- Product Data

Order product name	F15T8 SOFT WHITE/18 ALTO SL6
EAN/UPC - Product	046677392123
Order code	392126
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928022883028
Net Weight (Piece)	59.600 g

PHILIPS

Dimensional drawing

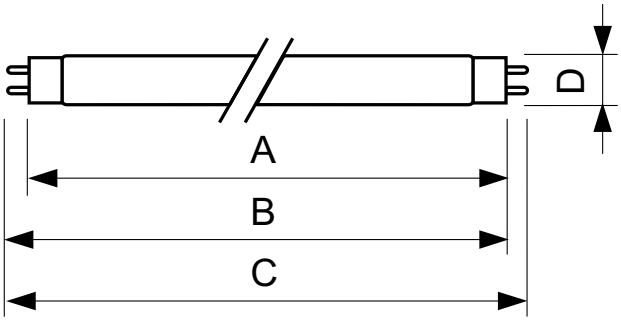

G13, T8



TL-D F15T8 Soft White/GC ALTO

Product	D	A	B	B	C
F15T8 SOFT WHITE/18 ALTO SL6	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.