PL-C Cluster 4-Pin Base Energy Advantage

PL-C 26W/835/XEW/4P/ALTO 21W

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes,configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

Product data

- General Information

Cap-Base	G24Q-3 [G24q-3]
Life To 50% Failures	16000 h
Preheat (Nom)	
Features	ALTO® (ALTO)

- Light Technical

Color Code	835 [CCT of 3500K]
Initial lumen (Nom)	1525 lm
Color Designation	White (WH)
Lumen Maintenance 2000 h (Nom)	92 %
Lumen Maintenance 5000 h (Nom)	85 %
Chromaticity Coordinate X (Nom)	409
Chromaticity Coordinate Y (Nom)	394
Correlated Color Temperature (Nom)	3500 K
Color Rendering Index (Nom)	82

- Operating and Electrical

Power (Rated) (Nom)	23.5 W
Lamp Current (Nom)	0.350 A

- Controls and Dimming

Dimmable	Yes

- Mechanical and Housing

Cap-Base Information	4P

- Approval and Application

Mercury (Hg) Content (Nom)	1.4 mg

- Product Data

Order product name	PL-C 26W/835/XEW/4P/ALTO 21W
EAN/UPC - Product	046677220471
Order code	220475
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927906783520
Net Weight (Piece)	60.400 g

PHILIPS

Dimensional drawing

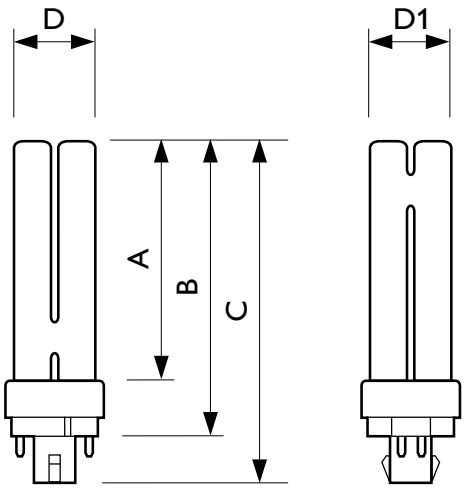

G24q-2/G24q-3 4P

PL-C XEW 26W/835/4P ALTO 21W

Product	D	D1	A	B	C
PL-C 26W/835/XEW/4P/ALTO 21W	27.1 mm	27.1 mm	130.7 mm	149.0 mm	163.9 mm



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting